

GX LINE




cmatic[®]
P N E U M A T I C F I T T I N G S

Innesti Rapidi in Acciaio Inox 316L
316L Stainless Steel Couplings
Coupleurs en Acier Inox 316L
Kupplungen aus Edelstahl 1.4404



GX 1	Innesto rapido multipresa in inox		Stainless steel multi socket quick coupling		Coupleur multiprofil en acier inox		Multiprofilkupplung aus Edelstahl	
2	3	4	5	6				
Corpo Body Corps Körper	Ghiera di comando Command Sleeve Douille de commande Absperrhülse	Otturatore Valve Clapet Ventil	Molle Springs Ressorts Feder	Sfere Balls Billes Kugel	Guarnizioni Seals Joint d'étanchéité Dichtung	Innesti Plugs Embouts Stecker		
Acciaio Inox AISI 316L (1.4404) Stainless Steel AISI 316L (1.4404) Acier Inox AISI 316L (1.4404) Edelstahl AISI 316L (1.4404)			Acciaio Inox AISI 302 Stainless Steel AISI 302 Acier Inox AISI 302 Edelstahl AISI 302	Acciaio Inox AISI 420 Stainless Steel AISI 420 Acier Inox AISI 420 Edelstahl AISI 420	FPM conforme FDA FPM Compliant With FPM conforme à FDA FPM, FDA Konform	Acciaio Inox AISI 316L (1.4404) Stainless Steel AISI 316L (1.4404) Acier Inox AISI 316L (1.4404) Edelstahl AISI 316L (1.4404)		

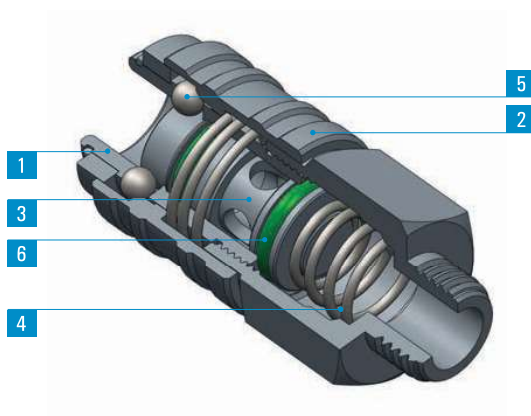

Interambiabilità con i profili Suitable with following plugs profiles Interchangeable avec les suivants profils Austauschbar mit folgenden Profilen		Portata Flow rate Débit Durchfluß	Nl/min (6 bar · Δp = 1bar)
	Profil Europeo European Profile Profil européen Europäisches Profil	820	
	Profil ISO 6150 B ISO 6150 B Profile Profil ISO 6150 B ISO 6150 B Profil	715	
	Profil Svedese Standard Swedisch Profile Profil Standard Suédois Standard schwedisches Profil	725	
	Profil Italiano Standard Italian Profile Profil Standard Italien Standard Italienisches Profil	670	
	Profil MIL C4109 MIL C4109 Profile Profil MIL C4109 MIL C4109 Profil	715	
	Profil ARO 210 ARO 210 Profile Profil ARO 210 ARO 210 Profil	705	

Scala 1:1 - Scale 1:1 - Echelle 1:1 - Maßstab 1:1


GX 10-11

Innesto rapido con filetto maschio

Male coupling

Coupleur mâle

Einschraubkupplung

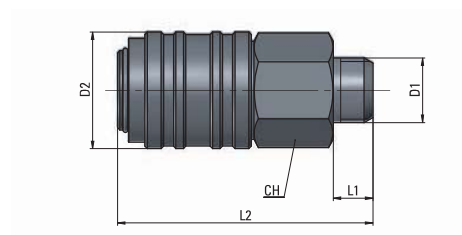

Type	D1	D2	L1	L2	CH	g $\Delta\Delta$
11 00 14	G1/4	23,5	8	51,5	21	87,8
11 00 38	G3/8	23,5	9	51,5	21	86,7


GX 10-12

Innesto rapido con filetto femmina

Female coupling

Coupleur femelle


Aufschraubkupplung

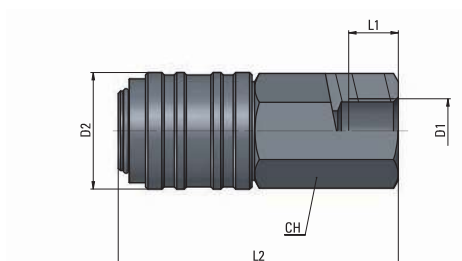


Type	D1	D2	L1	L2	CH	g $\Delta\Delta$
12 00 14	G1/4	23,5	10	56,5	21	110,9
12 00 38	G3/8	23,5	10	58	21	106,3

GX 10-20Innesto con filetto maschio,
profilo europeoMale plug according
to european profile

Embout mâle selon profil européen

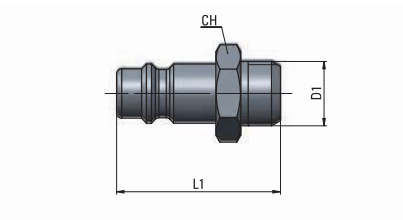Stecker gemäss europäisches
Profil, Einschraub

Type	D1	L1	CH	g $\Delta\Delta$
20 00 14	G1/4	33	17	20,5
20 00 38	G3/8	33	21	30,4

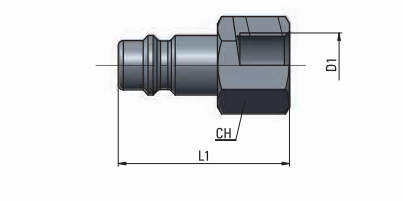GX 10-21Innesto con filetto femmina,
profilo europeoFemale plug according
to european profileEmbout femelle selon
profil européenStecker gemäss europäisches
Profil, Aufschraub

Type	D1	L1	CH	g $\Delta\Delta$
21 00 14	G1/4	34,5	17	23,6
21 00 38	G3/8	35	21	31,7
21 00 12	G1/2	38	24	39,3